


Glass Roving Package Holder for Unrolling

- Creel accepts standard Glass roving cakes for external unrolling
- Two Models available; GR-L for Low speed unrolling , GR-H for High speed applications
- GR-H fitted with quick stop breaking to prevent overrunning
- Let-Off guides ensure all packages have similar fibre paths & geometry
- No contact between rovings during operation

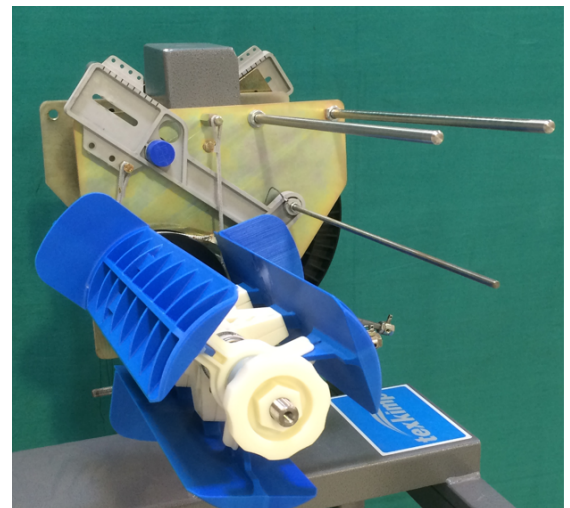

Creel Type GR

- Process Speed GR-L: 0-20 m/min
- Process Speed GR-H: 0-250 m/min
- Core diameter 6.5" - 7.5"

- Unrolling of standard Glass roving Packages
- Optional centrally adjustable tension control
- Running and reserve options available for near continuous running.
- Core is retract to release, cake is retained without power.
- Standard socket may be used to collapse the core for loading.