

viscoSHEET


**QUALITY AND FLEXIBILITY
WITHOUT COMPROMISE**

**UP TO 100 % rPET AND INHOUSE FLAKES
PROCESSABLE AT GUARANTEED
IV LEVELS FOR DIRECT FOOD CONTACT**



Benefits

- Turn-key solution – one supplier
- No virgin material necessary
- Immediate effect on recipe change
- Master control panel – one software
- Thickness range
- viscotec as your partner

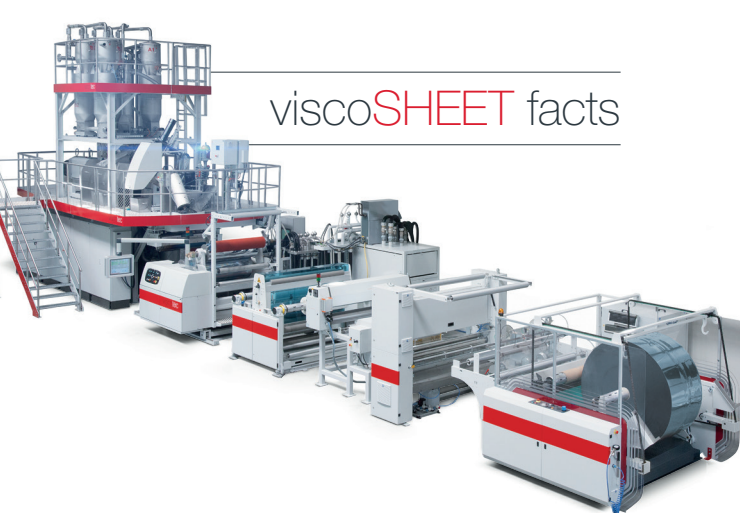

viscoSHEET facts

viscoSHEET ensures outstanding flexibility in production with lowest energy consumption. Up to 100% rPET, in-house waste, and virgin can be processed at guaranteed iV levels.

The continuous gravimetric dosing unit guarantees fast and flexible material or formulation changes during production process. Despite high operability and ease of handling, the roll stack and the fully automatic winder are fulfilling highest safety standards.


viscoSHEET	Input Materials	Main Ex output* [kg/h on PET]	Co Ex output* [kg/h on PET]	Rollstack [mm]	Winder	Thickness Range [μm]
		1000	200	1200	single or multiple roll	200–1200**
	bottle flakes,	1000	500	1600	single or multiple roll	** special customized configuration for 150–1800 μm
	in-house waste,	1500	1000	2400	multiple rolls	
	pellets, PCR pellets	500		1000	single roll	200–1000
	100% or mixes of the above	800	* output rates depending on input material			

Starlinger & Co. Gesellschaft m.b.H.
A member of Starlinger Group

Austria
4113 St. Martin im Mühlkreis
Adsdorf 38
N 48° 25' 60" | E 14° 2' 33"

T: +43 7232 38170
E: viscotec.sales@starlinger.com
www.viscotec.at
www.starlinger.com

viscoSHEET in detail

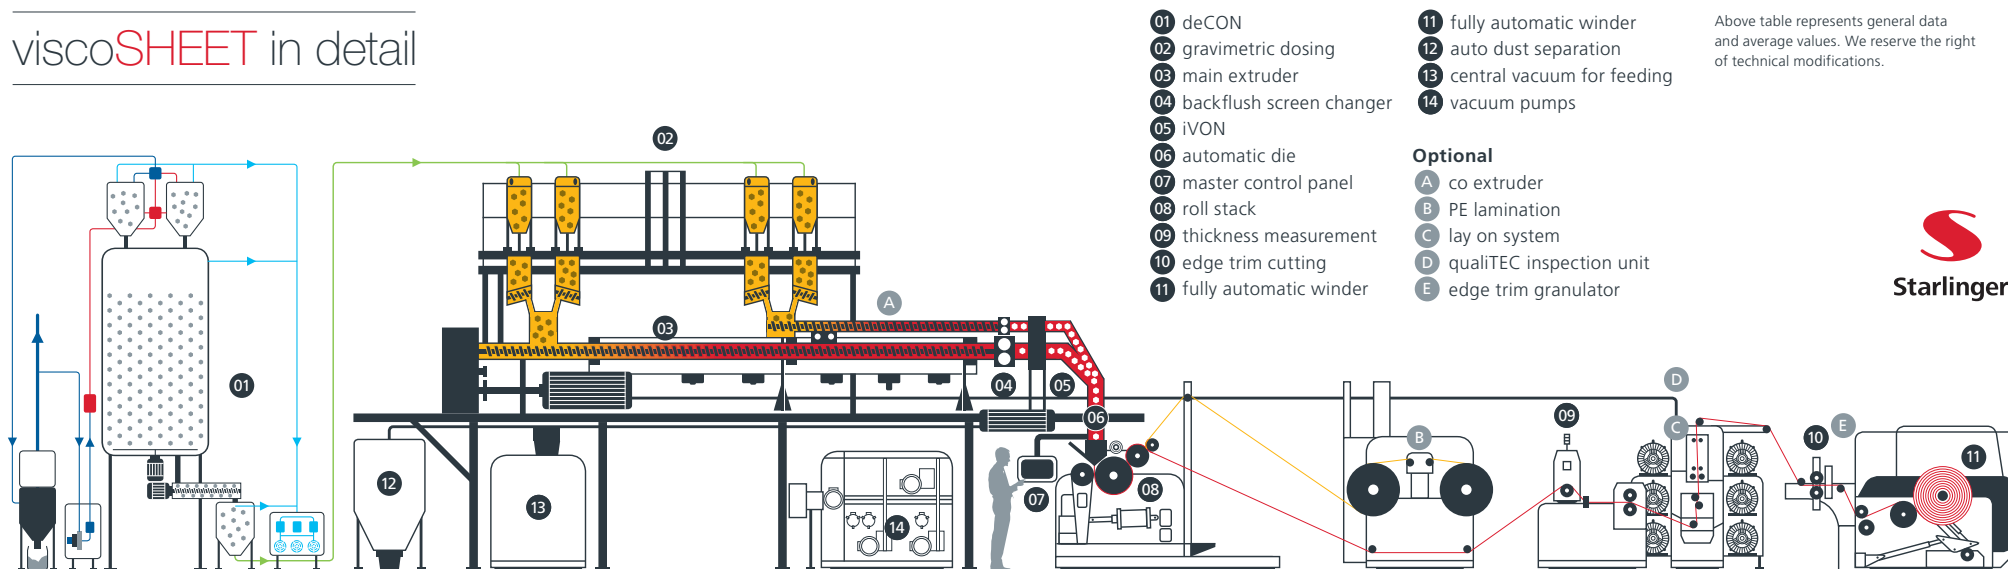

Above table represents general data and average values. We reserve the right of technical modifications.

